



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



S20

COMPACT MID-SIZE RIDER SWEEPER

- Compact in size, big on performance and durability
- Simple, easy-to-use controls reduce operator training with all-levers-forward design
- Unrivalled dust control performance with the SweepMax® system and ShakeMax® 360 technology

SETTING THE STANDARD IN COMPACT SWEEPER PERFORMANCE, SAFETY AND VALUE



MAXIMUM PRODUCTIVITY AND OPTIMUM CLEANING

- Maximize dust control and improve air flow filtration with the SweepMax® 3-stage dust control system.
- Clean from the inside out, dislodging dust particles lodged deep within the pleats with ShakeMax® 360 filter shaker.
- Compact size and indoor /outdoor flexibility increases machine use throughout the facility.
- Decrease operator training time and simplify machine operation with “All-Levers-Forward” controls.

INCREASED SAFETY

- Excellent operator sightlines, standard headlights and taillights, 7 in /180 cm side brush reach, and horn button in center of steering wheel.
- Thermo-Sentry™ hopper sensor alerts operators to excessive heat in the hopper and shuts down air flow to hopper.
- Seat occupancy switch shuts down the engine within seconds of the operator leaving the seat.
- Optional overhead guard with standard rear-view mirror and tower bumpers protect the operator and machine.

PROVEN TENNANT QUALITY FOR LONG-LASTING RETURN ON INVESTMENT

- Quality combines with easy maintenance features to make the S20 an exceptionally cost-effective sweeper that you can count on for years of reliable service.

THE CLEANING POWER OF A MID-SIZE SWEEPER IN A COMPACT MACHINE



THE SWEEPMAX® DUST CONTROL SYSTEM LETS YOU RUN LONGER

Improving air flow filtration and dust control for sweeping, the S20 SweepMax® system uses a 3-stage dust control system:

STAGE 1

Keep bulky debris, water, and heavy dust in the hopper with the first stage Perma-filter™.

STAGE 2

Remove fine dust and moisture by redirecting it into the hopper with the second stage cyclonic pre-filter.

STAGE 3

Filter sub-micron dust particulates down to 0.5 microns at 99% efficiency with a third stage, flame retardant, nanofiber surface loading canister filter.

This 3-stage system filters sub-micron dust particles to a MERV 13 rating on the ASHRAE 20 point scale.

S20 FEATURES THAT REDUCE COSTS

- Achieve maximum uptime with no-tool, easy-to-open covers for quick servicing.
- Decrease operating costs with the SweepMax second stage cyclonic pre-filter which removes the majority of dust and moisture before it reaches the third stage canister filter.
- The filter and cyclonic chamber and no-tool brush change make maintenance easy.
- Withstand the most demanding environments with full wrap-around steel T-beam superstructure and corrosion proof heavy-duty Duramer™ hopper and shrouds.

INSIDE THE S20

Dust Control. Provide superior air flow filtration and longer, better dry dust control with the SweepMax® system.


Operator Compartment. Ensure operator safety by alerting and shutting down air flow if increases in hopper temperature are sensed by Thermo-Sentry.™

Durable Construction. Depend on long-term structural reliability with a full wrap-around steel bumper with a steel T-beam superstructure designed for greater strength, rigidity, and long life.

Long Lasting Filtration. Nanofiber canister filter provides superior dust release for lower operating pressure and lasts up to 3 to 5 times longer than paper, cellulose, or synthetic media blends.

Simple Filter Cleaning. Increase efficiency with the ShakeMax® 360° filter cleaning mechanism, dislodging dust particles caught deep within the pleats.

Innovative Design. The dedicated belt driven vacuum fan and built-in muffler provide superior dust control, lower noise, and reduced maintenance.

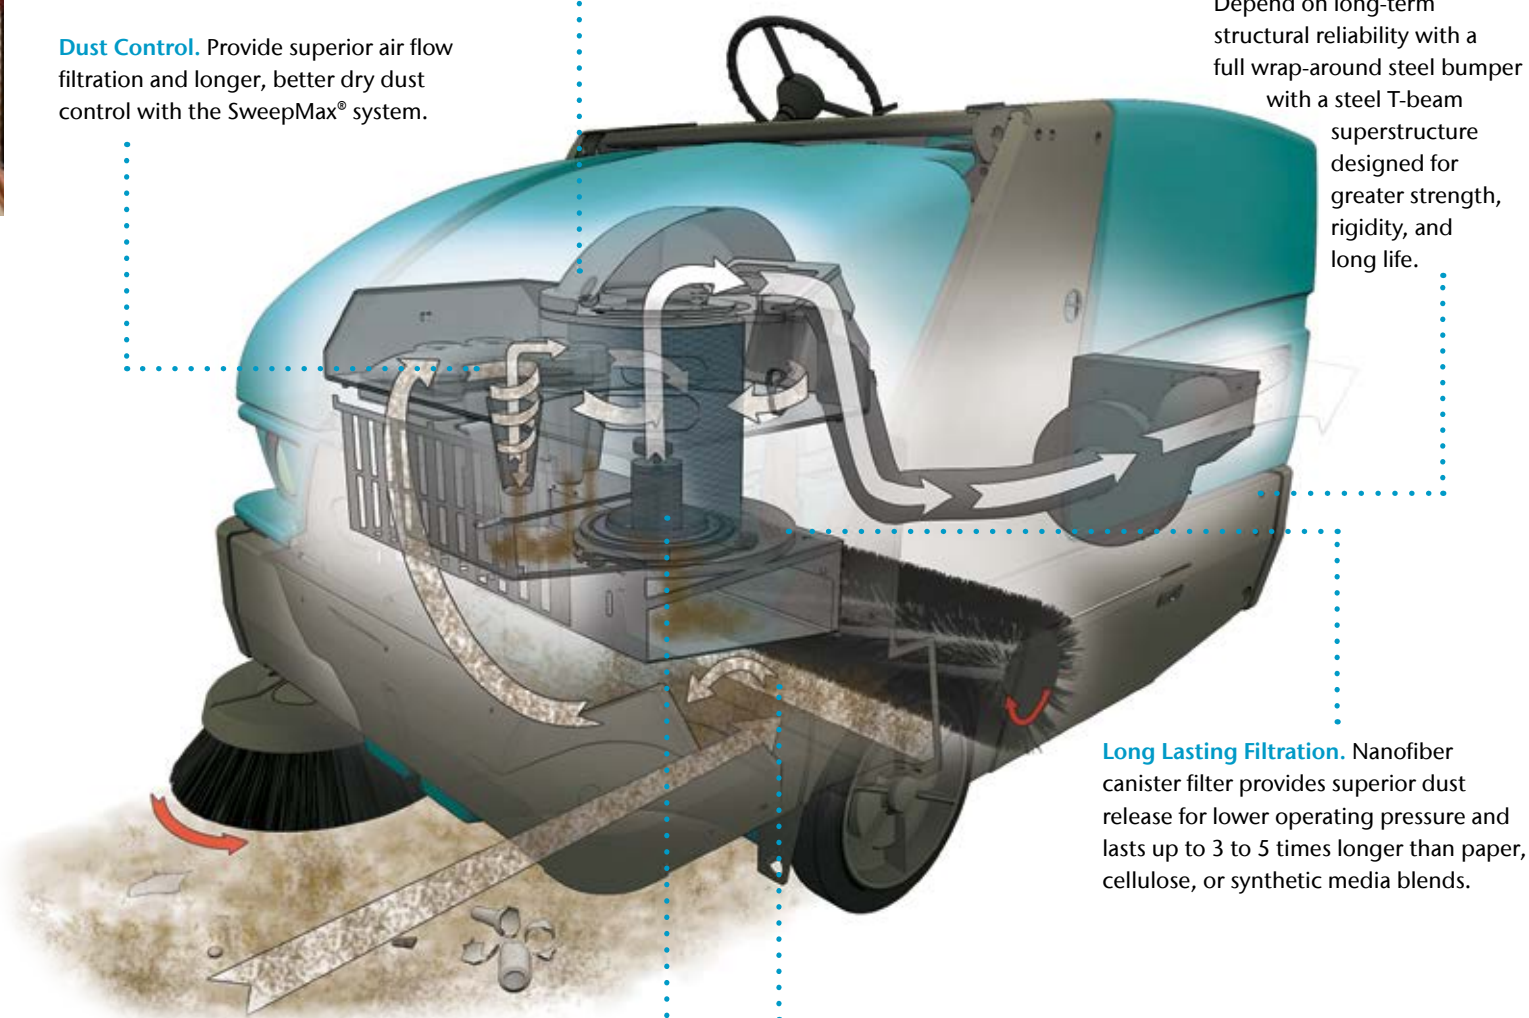

SAFETY, COMFORT, AND PERFORMANCE INSIDE THE S20 EVERY TIME YOU TURN THE KEY

- ▶ **Reduce downtime, service time, and maintenance costs** by quickly accessing the heart of the S20 with no-tool, easy-to-open covers.
- ▶ **Improve sweeping performance and extend filter life** through enhanced air flow filtration and dust control with the SweepMax® 3-stage dust control system.
- ▶ **Spacious operator compartment** incorporates adjustable seat, propel pedal, and steering column to customize fit. Important design safety features include excellent sightlines, side brush visibility, all levers forward sweeping, parking brake on light alert and much more.
- ▶ **Sustainable alternative.** High productivity cleaning of large areas with a quiet, fume-free battery version, eliminating engine exhaust.



Improve productivity with a 62 in / 1,575 mm sweeping path that shortens cleaning time by adding optional dual side brushes and a high-capacity debris hopper.

Increase safety and effective operation in the most severe environments with an optional overhead guard or the optional soft side cab that can be installed or removed in minutes to adjust for changing weather conditions.

Clean off aisle and in tight spaces with the convenient optional vacuum wand – stored securely on board so it is always there when you need it.

Minimize risk of damage and machine repair costs in harsh environments with optional tower bumpers that protect against accidental contact with hard objects.

KEY AVAILABLE FEATURES



- Reduce rework, labor and safety costs by using only Tennant *True* parts and service.
- Ensure optimal cleaning performance by selecting a Tennant *True* Service program.
- Improve uptime by leveraging Tennant *True* parts and service.

S20 COMPACT MID-SIZE RIDER SWEEPER

| SWEEPING SYSTEM | DIESEL / GASOLINE / LPG | BATTERY |
|--------------------------------------|---|---|
| Cleaning path | | |
| Single side brush | 50 in / 1,270 mm | 50 in / 1,270 mm |
| Dual side brush | 62 in / 1,575 mm | 62 in / 1,575 mm |
| BRUSH DRIVE SYSTEM | | |
| Main brush | | |
| Main brush length (tubular) | 36 in / 910 mm | 36 in / 910 mm |
| Main brush lift | Mechanical lever | Mechanical lever |
| Main brush drive | Hydraulic | Belt |
| Side brush diameter (disk) | 23 in / 580 mm | 23 in / 580 mm |
| Debris hopper | | |
| Volume capacity (polyethylene) | 11 ft ³ / 310 L | 11 ft ³ / 310 L |
| Volume capacity (steel) | 11.25 ft ³ / 319 L | — |
| Weight capacity (polyethylene) | 750 lb / 340 kg | 650 lb / 295 kg |
| Weight capacity (steel) | 700 lb / 318 kg | — |
| Dump height (variable to) | 60 in / 1,525 mm | 60 in / 1,525 mm |
| Dump reach | 14 in / 355 mm | 14 in / 355 mm |
| POWER SYSTEM | | |
| Engine-gasoline/LPG | 23 hp / 17 kW | — |
| Engine-diesel | 21 hp / 16 kW | — |
| Battery options | | |
| Standard capacity (6-6V) | — | 315 Ah |
| Standard capacity, long life (2-18V) | — | 340 Ah |
| High capacity, long life (2-18V) | — | 440 Ah |
| PROPELLING SYSTEM | | |
| Propel speed forward (variable to) | 6.0 mph / 10 km/h | 5.0 mph / 8.0 km/h |
| Propel speed reverse (variable to) | 3.0 mph / 4.8 km/h | 3.0 mph / 4.8 km/h |
| Gradeability | | |
| Full hopper | 10.0 deg / 17.6% | 8.0 deg / 14.1% |
| Empty hopper | 14.0 deg / 25.0% | 10.0 deg / 17.6% |
| DUST CONTROL SYSTEM | | |
| Filter system (triple stage) | | |
| Stage 1 | Perma-filter™ | Perma-filter™ |
| Stage 2 | Cyclonic pre-filter | Cyclonic pre-filter |
| Stage 3 (canister filled) | 80 ft ² / 7.4 m ² | 80 ft ² / 7.4 m ² |
| Filtration level (up to) | 0.5 microns @ 99% efficiency | |
| Vacuum fan | 1.5 hp / 1.12 kW | 1.0 hp / 0.75 kW |
| Vacuum fan speed | 6,480 rpm | 6,100 rpm |
| Vacuum diameter | 9 in / 230 mm | 9 in / 230 mm |
| MACHINE SPECIFICATIONS | | |
| Length | 82.3 in / 2,090 mm | 82.3 in / 2,090 mm |
| Width | 48.5 in / 1,230 mm | 48.5 in / 1,230 mm |
| Height | | |
| With overhead guard | 82.1 in / 2,085 mm | 82.1 in / 2,085 mm |
| Without overhead guard | 49.5 in / 1,260 mm | 49.5 in / 1,260 mm |
| Weight (net) without battery | — | 2,300 lb / 1,045 kg |
| Weight (net) with standard battery | 2,450 lb / 1,110 kg | 2,975 lb / 1,350 kg |
| Minimum aisle turn | 95 in / 2,415 mm | 95 in / 2,415 mm |

WARRANTY

See your local representative for warranty information

Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information,
send an email to info@tennantco.com

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA: +1.800.553.8033
Overseas: +1.763.540.1315

www.tennantco.com
info@tennantco.com