

旨在降低您的清洁成本，提升场馆形象并提供一个安全的环境。
 DESIGNED TO HELP REDUCE YOUR COST TO CLEAN, IMPROVE FACILITY IMAGE, AND PROVIDE A SAFE ENVIRONMENT.



这里将介绍T17洗地机的主要功能是如何满足您的需求。 HERE IS HOW THE T17'S KEY FEATURES SUPPORT YOUR BUSINESS NEEDS



可调节清洁向下压力 Adjustable Cleaning Down Force	●	●	●	●
双真空风扇 Dual Vacuum Fans	●	●	●	
经济模式设置 Economy Mode Setting	●			●
眼睛向前操作 Eyes Forward Operation	●	●		●
清水和污水箱容量大 Large Solution and Recovery Tank Capacity	●	●	●	●
噪音水平低 Low Noise Level	●	●	●	●
踏板高度低 Low Step-In Height		●		●
免维护的驱动和洗地刷头马达 Maintenance-Free Propel and Scrub Brush Motors	●		●	●
以操作人员为本的设计 Operator-Centric Design	●	●	●	●
呈抛物线型摆动的吸水扒 Parabolic Swinging Squeegee	●	●	●	●
申请专利技术的排水器 Patent Pending Water Trap	●	●	●	●
质量控制 QA Controls	●	●	●	●
方便接触污水箱的踏板 Recovery Tank Access Step	●	●		●
Smart Release™尾部吸水扒 Smart Release™ Rear Squeegee	●	●	●	●
1-Step™一键式启动按钮的Touch-n-Go™控制模块 Touch-n-Go™ Control Module with 1-Step™ Start Button	●	●		●
UL认证 UL Type E**	●	●	●	
污水管 Flow Control Cuffs	●	●		●
带缓冲辊的全钢机身包裹式保护栏 Wrap-Around Steel Bumper with Front Corner Rollers	●			●
黄色维护触点 Yellow Touch-Points	●			●
自动装水 Auto Fill	○			○
ec-H2O™电解活性水洗地技术 ec-H2O™ Cleaning Technology	○	○	○	○
FOPS认证的机顶保护架 FOPS Certified Overhead Guard	○	○	○	○
最大的电瓶容量 (最大为930AH) Largest Available Battery Capacity (up to 930 AH)	○		○	○
可伸缩的水枪装置 Retractable Spray Hose for Machine Cleanout	○	○		○
洗地边刷或扫地边刷 Scrubbing Side Brush or Sweeping Side Brushes	○	○	○	○
真空吸管 Vacuum Wand	○	○	○	○

** ES类UL认证作为一个有效的可选项
 ** UL Type ES also available as an option

● 标准特性 Standard Features
 ○ 可选特性 Optional Features



电解活性水洗地技术将水变成创新的清洁剂，达到更有效清洁、节省资金、提升安全性，相对日常清洗剂更能降低对环境的影响。

ec-H2O™ technology electrically converts water into an innovative cleaning solution that cleans effectively, saves money, improves safety, and reduces environmental impact* compared to daily cleaning floor chemicals and methods.



* 基于EcoForm™学术报告，登陆www.tennantco.com了解更多详情。
 * Based on a study by EcoForm™. Visit www.tennantco.com for more information.

■ 只使用TennantTrue配件和服务能够减少返工、劳动量以及安全成本
Reduce rework, labor and safety costs by using only TennantTrue parts and service.

■ 选择TennantTrue服务项目, 可以确保您获得高效的清洁性能
Ensure optimal cleaning performance by selecting a TennantTrue Service program.

■ 使用TennantTrue的配件和服务, 可以延长机器的正常使用时间。
Improve uptime by leveraging TennantTrue parts and service.

T17 驾驶式洗地机

T17 BATTERY-POWERED RIDER SCRUBBER

洗地系统 SCRUBBING SYSTEM

清洁宽度 Cleaning path	40 in / 1,015 mm
带洗地边刷 With scrubbing side brush	52 in / 1,320 mm
带右扫地边刷 (仅限滚刷洗地) With RH sweeping side brush (cyl scrub only)	46 in / 1,165 mm
带双扫地边刷 (仅限滚刷洗地) With dual sweeping side brush (cyl scrub only)	52 in / 1,320 mm
预扫系统 Sweeping with Pre-sweep	49.4 in / 1,254 mm
主滚刷 Cylindrical main brushes	
刷子速度 Brush speed	500 rpm
刷子直径 (2) Brush diameter (2)	9 in / 230 mm
刷子向下压力 (最大至) Brush down force (up to)	550 lb / 250 kg
刷子马达, 无刷型 (2) Brush motors, brushless (2)	1.5 hp / 1.125 kW
碎片垃圾箱 Debris hopper	.7 ft ³ / 20 L
主盘刷 Disk main brushes	
刷子速度 Brush speed	315 rpm
刷子尺寸直径 (2) Brush size diameter (2)	20 in / 510 mm
刷子向下压力 (最大至) Brush down force (up to)	550 lb / 250 kg
刷子马达, 无刷型 (2) Brush motor, brushless (2)	1.5 hp / 1.125 kW
可选预扫装置 Optional Pre-sweep	
碎片容量 (总体) Debris capacity (overall)	1.3 ft ³ / 37 L
过滤袋容量 Filter bag capacity	1.0 ft ³ / 28 L
水箱 Tanks	
清水箱 Solution tank	75 gal / 285 L
污水箱 Recovery tank	91.1 gal / 346 L
除雾消泡室 Demisting chamber	16.1 gal / 61 L
真空风扇 (2个) Vacuum fan (Dual)	2 x .8 hp / 2 x .6 kW
速度 Speed	14,500 rpm
吸水高度 Water lift	65 in / 1,650 mm

驱动系统 PROPELLING SYSTEM

前进驱动系统 (运输时可变至) Propel speed forward (transport variable to)	5.5 mph / 9 km / h
前进驱动系统 (洗地时可变至) Propel speed forward (scrubbing variable to)	4.0 mph / 6.5 km / h
后退驱动系统 (可变至) Propel speed reverse (variable to)	3 mph / 5 km / h
速度控制 Speed control	电子控制-交流电 Electronic - AC
爬坡能力 Gradeability	基本单位/带爬坡装置 Base Unit / w/Ramp Kit
爬坡能力 (拖车空载时爬坡能力) Transport (empty for trailering)	12° / 21% 12° / 21%
空载时爬坡能力 Transport at gross weight	7° / 12% 8.5° / 14.8%
工作 (洗地时) Working (scrubbing)	5° / 8.7% 6° deg / 10.5%

电瓶选择 (持续不断正常工作时间: 经济模式)

BATTERY SELECTIONS (est. continuous runtime: economy mode)

电瓶可选包 Battery optional packages	(最高至3.5小时) 36V, 510 AH C/6 (up to 3.5 hrs) 36V, 510 AH C/6
(电瓶充电器可为所选的电瓶充电) (Battery chargers available for all optional batteries)	(最高至5.75小时) 36V, 750 AH C/6 (up to 5.75 hrs) 36V, 750 AH C/6
	(最高至7.5小时) 36V, 930 AH C/6 (up to 7.5 hrs) 36V, 930 AH C/6

机器规格 Machine SPECIFICATIONS

机器基本长度 Length basic machine	87.9 in / 2,230 mm
带预扫装置的机器长度 Length with pre-sweep	113 in / 2,870 mm
宽度 Width	46 in / 1,168 mm
高度 (方向盘顶部) Height (top of steering wheel)	58.25 in / 1,480 mm
带机顶保护架 With overhead guard	82.5 in / 2,096 mm
带标准510AH电瓶的机器重量 Weight with standard 510 AH batteries	3,365 lb / 1,525 kg
最小转弯直径 Minimum aisle turn	93.25 in / 2,370 mm
噪音水平 (操作人员听到的) Sound level (operator's ear)	
盘刷模式: 模式 #2* Disk: Mode #2*	65 dBA; Kpa 3 dBA
滚刷模式: 模式 #2* Cylindrical: Mode #2*	66 dBA; Kpa 3 dBA
声压水平 (IEC 60335-2-72测试) Sound pressure level tested per IEC 60335-2-72	

*真空风扇开启、吸水机关闭、刷子开启、刷子抬起
*Vacuum On, Squeegee Down, Brushes On, Brushes Up

质量保证 WARRANTY

请向当地销售获取相关信息
See your local representative for warranty information
规格如有变动, 恕不另行通知
Specifications subject to change without notice.

眼见为实
SEEING IS BELIEVING

如需产品演示或更多产品信息, 请与我们联系。
销售热线: 800 820 2366
服务热线: 400 820 0885
网 址: www.tennantco.com.cn
邮 箱: tennantchina@tennantco.com



请扫描关注坦能最新动态

坦能清洁系统设备 (上海) 有限公司
地址: 上海市青浦区白鹤镇漕盈路
3777号1幢 (201712)
电话: (8621) 6922 5333
传真: (8621) 6922 5262

坦能北京分公司
地址: 北京市朝阳区高碑店高井文化园
南广场1号楼西区 (100123)
电话: (8610) 8579 5990
传真: (8610) 8576 0990

坦能广州分公司
地址: 广州市天河区员村四横路128号
红专厂艺术生活区F12B (510655)
电话: (8620) 3703 9887
传真: (8620) 3703 9820



创造一个更清洁、更安全、更健康的世界。
CREATING A CLEANER, SAFER, HEALTHIER WORLD.

设备 EQUIPMENT



T17

驾驶式洗地机

HIGH-PERFORMING, HEAVY-DUTY, BATTERY RIDER SCRUBBER

- 在恶劣的工业环境中，最大程度地提高清洁性能
Maximize your floor cleaning capacity in the harshest industrial locations
- 设备持久耐用、结构坚固，最大程度地节约成本并保护您的资产
Minimize costs and protect your investment with durable and quality construction
- 污水回收系统使地面快速干燥，有效降低滑倒的风险
Reduce slips and falls with water recovery system that leaves floors virtually dry
- 电解活性水洗地技术（ec-H₂O™）让清洁更高效
Clean effectively with ec-H₂O™ technology
- 提供便捷的操作和维护体验
Provide an easy operator and maintenance experience



通过ISO 9001:2008
质量管理体系认证

一款创新的工业级、高性能的电瓶洗地机，它专注于提供专业的清洁解决方案来满足顾客的需求。

AN INNOVATIVE HEAVY-DUTY, HIGH-PERFORMANCE, BATTERY RIDER-SCRUBBER FOCUSED ON DELIVERING CUSTOMIZED SOLUTIONS TO MEET CUSTOMER NEEDS.



T17洗地机解决您业务方面的挑战

THE T17 ADDRESSES YOUR KEY BUSINESS CHALLENGES



降低清洁成本

REDUCE COST TO CLEAN

清洁效率

Productivity

- 切换为经济模式后可获得同类产品最大的电瓶容量，一次充电可以清洁7-8个小时。免维护的无刷洗地马达和驱动马达有效地节约清洁成本。

Clean a 7-8 hour shift in economy mode, on a single charge, with the largest available battery capacity in its class and reduce costs with maintenance-free brushless scrub and propel motors.

持久耐用

Durability

- 高性能洗地机可有效地保护您的资产，在恶劣环境中的也能降低磨损和消耗。

Protect your investment with a high-performance scrubber that withstands wear and tear in the harshest environments.



健康和安全

HEALTH & SAFETY

- 出色的污水回收系统有效地保持一个安全的环境，减少滑倒的危险。

Help maintain a safe environment with reduced risk of slips and falls with our excellent water recovery system.



提升场馆形象

ENHANCE FACILITY IMAGE

- 高性能的洗地系统具有出色的清洁能力，让您的场馆地面保持一贯高标准的清洁。

Maintain a high standard of consistently clean floors in your facility with a high-performance scrub system that delivers significant cleaning power.



便捷操作维护

EASY OPERATION & MAINTENANCE

- 简单的控制和黄色维护触点让您快速找到需要维护的位置，最大程度地延长机器的正常运行时间。

Maximize uptime with easy-to-use operator controls and yellow touch points that provide quick identification to maintenance locations.

内部

INSIDE THE

T17

1-Step™ 一键式单独的绿色启动按钮，简化操作人员的培训流程。
 1-Step™ start button simplifies operator training with controls that enable scrubbing systems to be activated with a single large green button

最大的电瓶容量有效提升清洁效率。
 Largest available battery capacity provides increased cleaning productivity

垃圾篮可以防止堵塞。
 Debris basket prevents clogging

全方位的保护架，保护操作人员的安全。
 Full front shroud provides operator protection

包裹式全钢保护栏保护您的资产。
 Wrap-around steel bumper helps protect your investment

免维护的交流驱动系统使用密封的，速度可控的无刷马达，延长零件的使用寿命。
 Maintenance-free AC propel system extends component life through the use of a sealed, controlled-speed, brushless motor

黄色维护触点节约时间，并提供正确的维护。
 Yellow touch points save time and ensure proper maintenance

缓冲辊在操作时提供又一层保护。
 Cushioned stacked rollers provide a layer of protection while maneuvering

使用滚刷刷头，可以让洗地和扫地一次通过。
 Cylindrical scrub head for scrubbing and sweeping in a single pass



摇摆式吸水扒具有出色的污水回收能力，有效降低滑倒或摔倒的危险。
 Swinging squeegee provides excellent water recovery to help reduce slips and falls

可选的右侧或双向扫地边刷使得边缘的清洁更加高效。
 Optional right hand or dual sweeping side brushes for edge-to-edge cleaning efficiency

可选的干式预扫系统，拾取碎片和尘土变得简单高效。
 Optional dry sweeping system captures debris and dust effectively for easy disposal.

盘刷刷头清洁效果卓越，无需工具即可进行简单更换。
 Disk scrub head for effective scrubbing and simple no-tool brush change.


洗地边刷可以扩大边缘清洁范围，拓宽30%的洗地路径。
 Scrubbing side brush for increased reach allowing edge-to-edge cleaning and 30% wider scrub path.

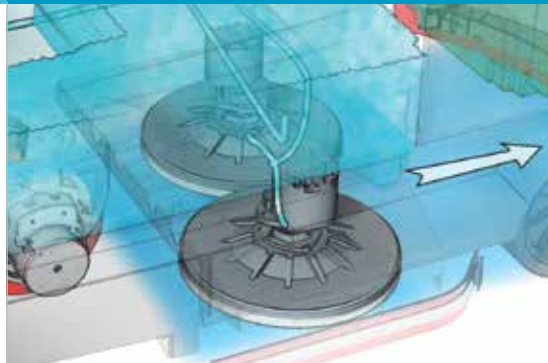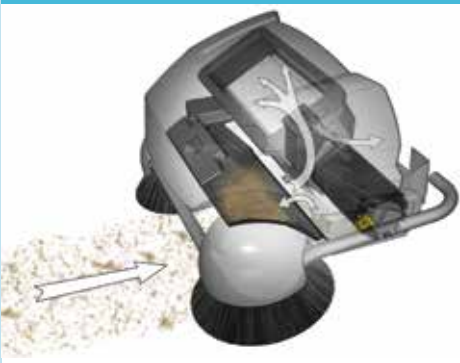

专为提高效率而做的工程设计 ENGINEERED FOR PRODUCTIVITY

专利技术帮助水远离地面 PATENT-PENDING TECHNOLOGY HELPS KEEP WATER OFF YOUR FLOORS

Dura-Trak™ 抛物线型摇摆式吸水扒提供整条吸水扒一直的吸水力，以保证卓越的污水回收效果，保持地面干燥。
Dura-Trak™ squeegee leaves floors drier with a swinging parabolic design that provides uniform suction across the squeegee blade for exceptional water pickup.

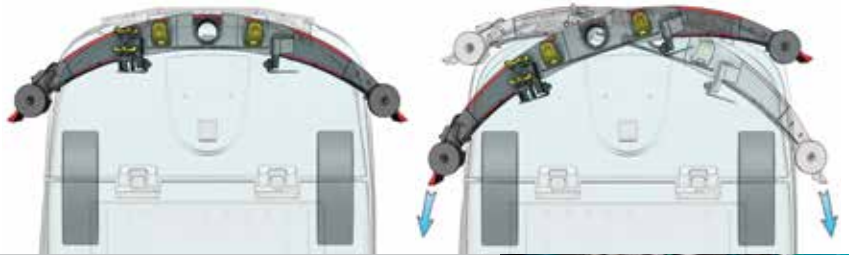

1-Step™ 一键式启动按钮
1-Step™ Start Button

相较于单真空风扇系统，双真空风扇提供更多气流，防腐蚀叶轮的设计延长使用寿命。
Dual vacuum fans provide more airflow than single fan systems. The corrosion-resistant impeller design enables them to last longer than other fans.



双真空风扇
Dual Vacuum Fans

革命性的已申请专利技术的污水回收器提供无限制的气流以及对机器关闭时残留在污水回收管内水分进行捕获或吸收，有效地减少了溢出和滴漏的情况。
Revolutionary patent-pending water trap helps reduce spills and dripping by providing unrestricted airflow and captures moisture left in the recovery hose on shutdown.



脱水器和黄色维护触点
Water Trap and Yellow Maintenance Touch Points



方便接触污水箱的踏板
Recovery Tank Access Step

污水管装有易调节的水箱排水阀，防止污水溢出。排水管长3in (77mm)，可进行快速排水。
Flow control cuff prevents messy clean ups and overflows with the easily adjustable tank drain valve. Large 3 in (77 mm) drain hoses deliver fast clean out.



流控口
Flow Control Cuff

FOPS认证的机顶保护架，有效保护操作人员免受落物砸伤
FOPS certified overhead guard protects operators from falling objects.

真空吸管可方便快捷地将机器上溅出的液体回收
Vacuum wand provides convenient and quick off-machine spill recovery.

利用水枪装置可简单快速的清洁设备本身
Spray hose makes machine spray-down and cleanup quicker and easier.

尾部吸水扒保护装置可帮助降低维护成本并防止对吸水扒的损坏。
Rear squeegee protection kit helps lower maintenance and repair costs and prevents damage to squeegee.

主要特性 KEY OPTIONS

